
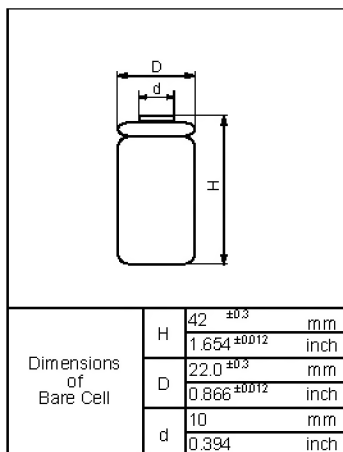


# SANYO Cadnica

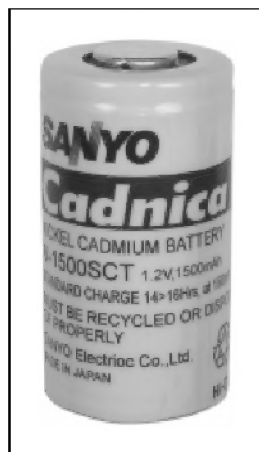


## Cell Type KR-1500SCT Specifications


Nominal Capacity			1500mAh			
Nominal Voltage			1.2V			
Charging Current		Standard	150mA			
		Quick	300mA			
Charging Time		Standard	14 to 16Hrs.			
		Quick	7 to 8Hrs.			
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]			
		Quick	0°C to +45°C [+32°F to 113°F]			
	Discharge		-20°C to +60°C [ -4°F to 140°F]			
	Storage		-30°C to +50°C [ -22°F to 122°F]			
Internal Impedance (Av.) (at. 50% discharge)			5.6mΩ (at 1000Hz)			
Weight			47g/ 1.66oz			
Dimensions(D)×(H) (with tube)			22.9 <sup>0</sup> <sub>-.1</sub>	×	43.0 <sup>0</sup> <sub>-.12</sub>	mm
			0.90 <sup>0</sup> <sub>-0.04</sub>	×	1.69 <sup>0</sup> <sub>-0.05</sub>	inch

## Typical Characteristics


### Charge

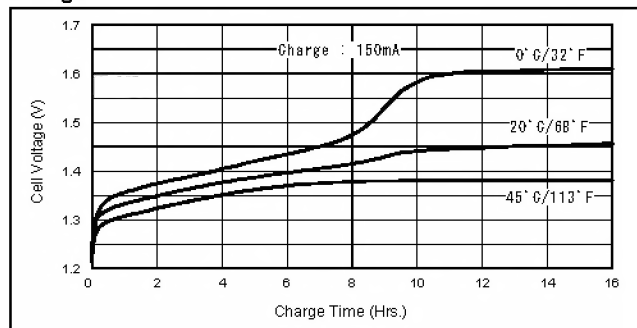


### Discharge(at high rate)

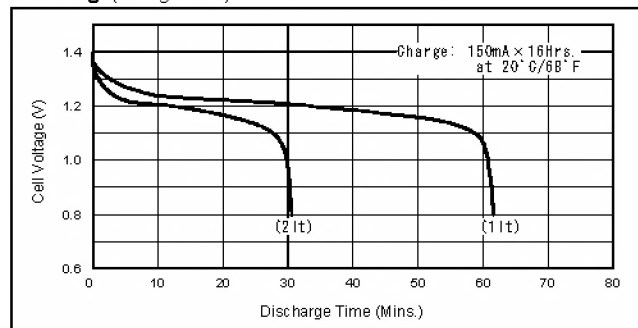


### Charge

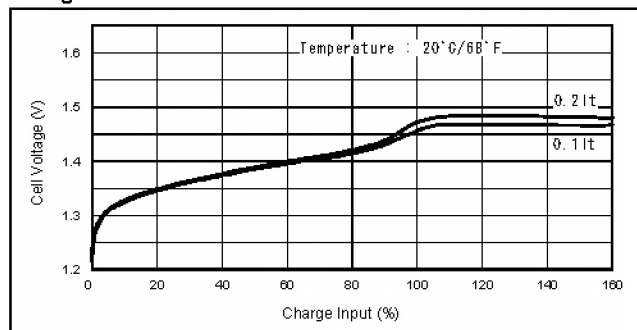

### Discharge(at high rate)

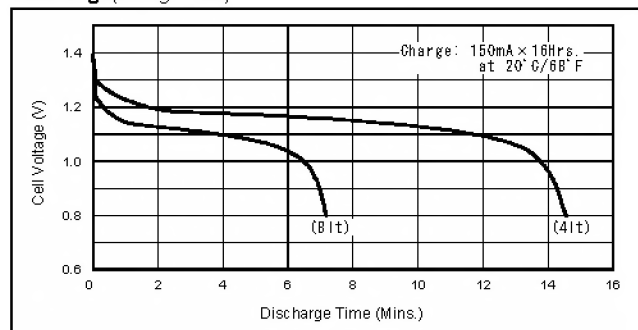

### Discharge(at low rate)

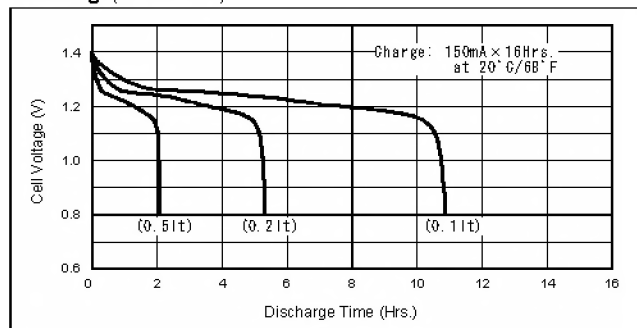

### Temperature(Charge & Discharge)

